



Specification Sheet

Product:	Avanti*
	
Fiber:	100% Polypropylene
Structure:	Loop pile: Level loop
Gauge:	1/10"
Stitches:	11 per inch
Tufts/sqm:	170500
Average Pile Height:	3.0+/-0.5mm
Total Height:	5.2+/-0.5mm
Pile Weight:	550g/sqm
Total Weight:	3250g/sqm
Tile Size:	50*50cm
Backing:	E+Bac (Bitumen Backing)
Approved Installation Method:	 Brick Quarter-turn
Flammability:	ASTM E 645: ≥ 0.22 watts/cm ² Class II
Smoke Density:	ASTM E 662: ≤ 450 DMC
Dimensional Stability	AACHEN: ≤ 0.2 %
Tuft Bind:	ASTM D 1335: ≥ 8.0 lbs
Delamination:	ASTM D 3936: ≥ 3.0 lbc/in
Static Propensity	AATCC 134: ≤ 3.5 kV
Colorfastness to Light	AATCC 16E: $\geq 4-5$
Colorfastness to Water	AATCC 107: $\geq 4-5$
Colorfastness to Crocking	AATCC 165: $\geq 4-5$

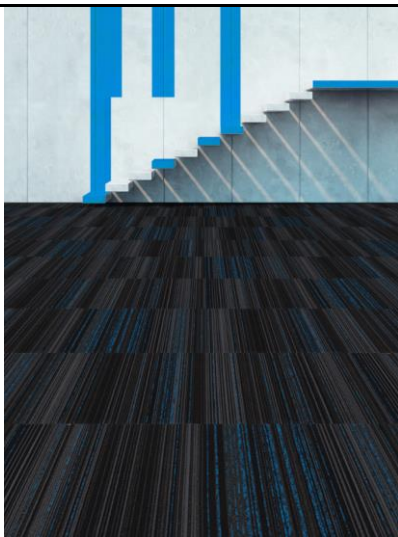

AATCC 16E
 $\geq 4-5$



AATCC 107
 $\geq 4-5$



AATCC 165
 $\geq 4-5$



AATCC 134
 ≤ 3.5 kV



ASTM D 3936
 ≥ 3.0 lbc/in



ASTM D 1335
 ≥ 8.0 lbs



AACHEN
 ≤ 0.2 %



ASTM E 662
 ≤ 450 DMC



ASTM E 645
 ≥ 0.22 watts/cm²
Class II